

# Mist 設定マニュアル

## - WLAN -

# AirWatchの設定

---

ジュニパーネットワークス株式会社  
2021年7月 Ver 1.0


JUNIPER   
driven by Mist AI

# はじめに

- ❖ 本マニュアルは、『AirWatchの設定』について説明します
- ❖ 手順内容は 2021年7月 時点の Mist Cloud にて確認を実施しております  
実際の画面と表示が異なる場合は以下のアップデート情報をご確認下さい  
<https://www.mist.com/documentation/category/product-updates/>
- ❖ 設定内容やパラメータは導入する環境や構成によって異なります  
各種設定内容の詳細は下記リンクよりご確認ください  
<https://www.mist.com/documentation/>
- ❖ 他にも多数の Mist 日本語マニュアルを「ソリューション & テクニカル情報サイト」に掲載しております  
<https://www.juniper.net/jp/ja/local/solution-technical-information/mist.html>


# 無線LAN AirWatchの設定

1. [Network]から[WLANs] をクリックします

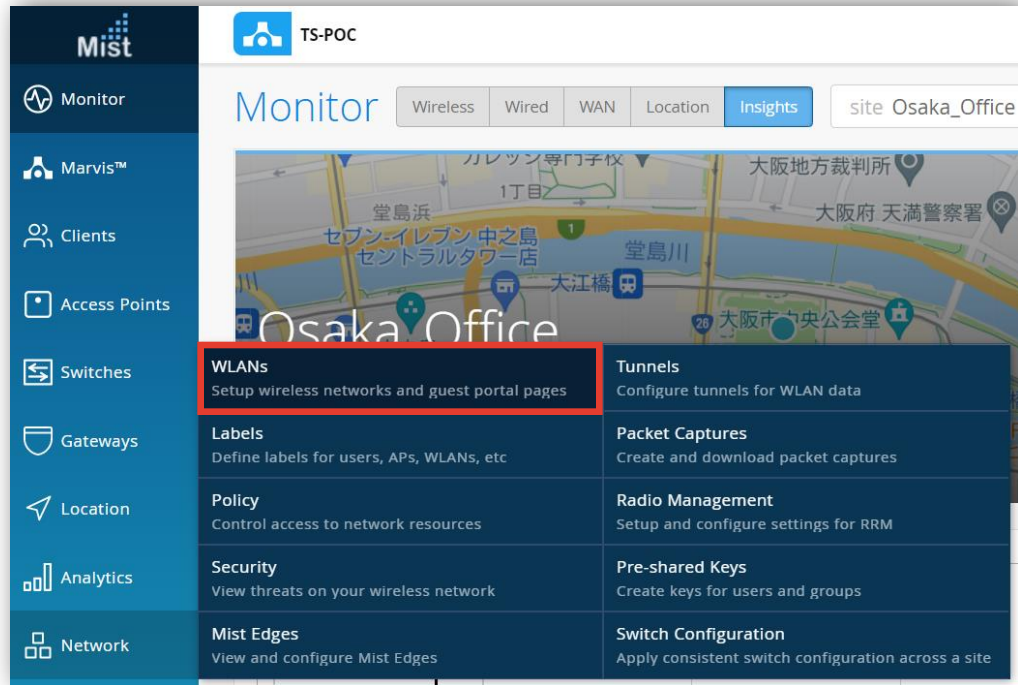

The screenshot shows the Mist Network Management console interface. The left sidebar contains a navigation menu with the following items: Monitor, Marvis™, Clients, Access Points, Switches, Gateways, Location, Analytics, and Network. The 'Network' item is selected, and a sub-menu is displayed with the following options: WLANs (Setup wireless networks and guest portal pages), Labels (Define labels for users, APs, WLANs, etc), Policy (Control access to network resources), Security (View threats on your wireless network), Mist Edges (View and configure Mist Edges), Tunnels (Configure tunnels for WLAN data), Packet Captures (Create and download packet captures), Radio Management (Setup and configure settings for RRM), Pre-shared Keys (Create keys for users and groups), and Switch Configuration (Apply consistent switch configuration across a site). The 'WLANs' option is highlighted with a red box.

2. 対象のSSIDをクリックします

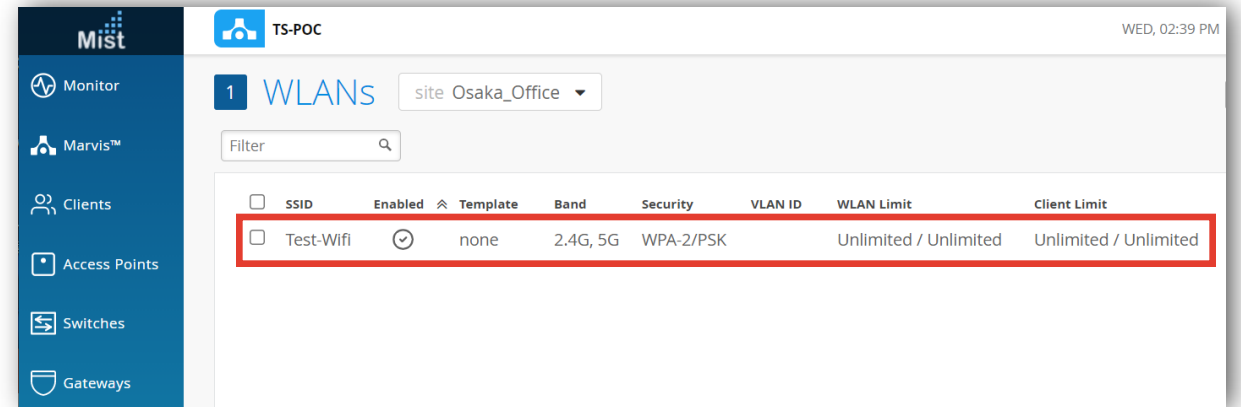

The screenshot shows the Mist Network Management console interface for the 'WLANs' page. The page title is '1 WLANs' and the site is 'Osaka\_Office'. A filter search bar is present. Below the filter is a table of WLAN configurations. The table has the following columns: SSID, Enabled, Template, Band, Security, VLAN ID, WLAN Limit, and Client Limit. The 'Test-Wifi' row is highlighted with a red box.

SSID	Enabled	Template	Band	Security	VLAN ID	WLAN Limit	Client Limit
Test-Wifi	<input checked="" type="checkbox"/>	none	2.4G, 5G	WPA-2/PSK		Unlimited / Unlimited	Unlimited / Unlimited

# 無線LAN AirWatchの設定

## 3. AirWatch欄にて連携設定を実施します

AirWatch

Enabled  Disabled

Console URL

API Key

Username


Password [Reveal](#)

Enabledを選択すると、VMware AirWatchとの連携ができます

- Console URL : AirWatchのコンソールURLを入力
- API Key : APIキーを入力
- Username : ユーザ名を入力
- Password : パスワードを入力

# 無線LAN AirWatchの設定

4. [Save]をクリックすれば、設定完了です

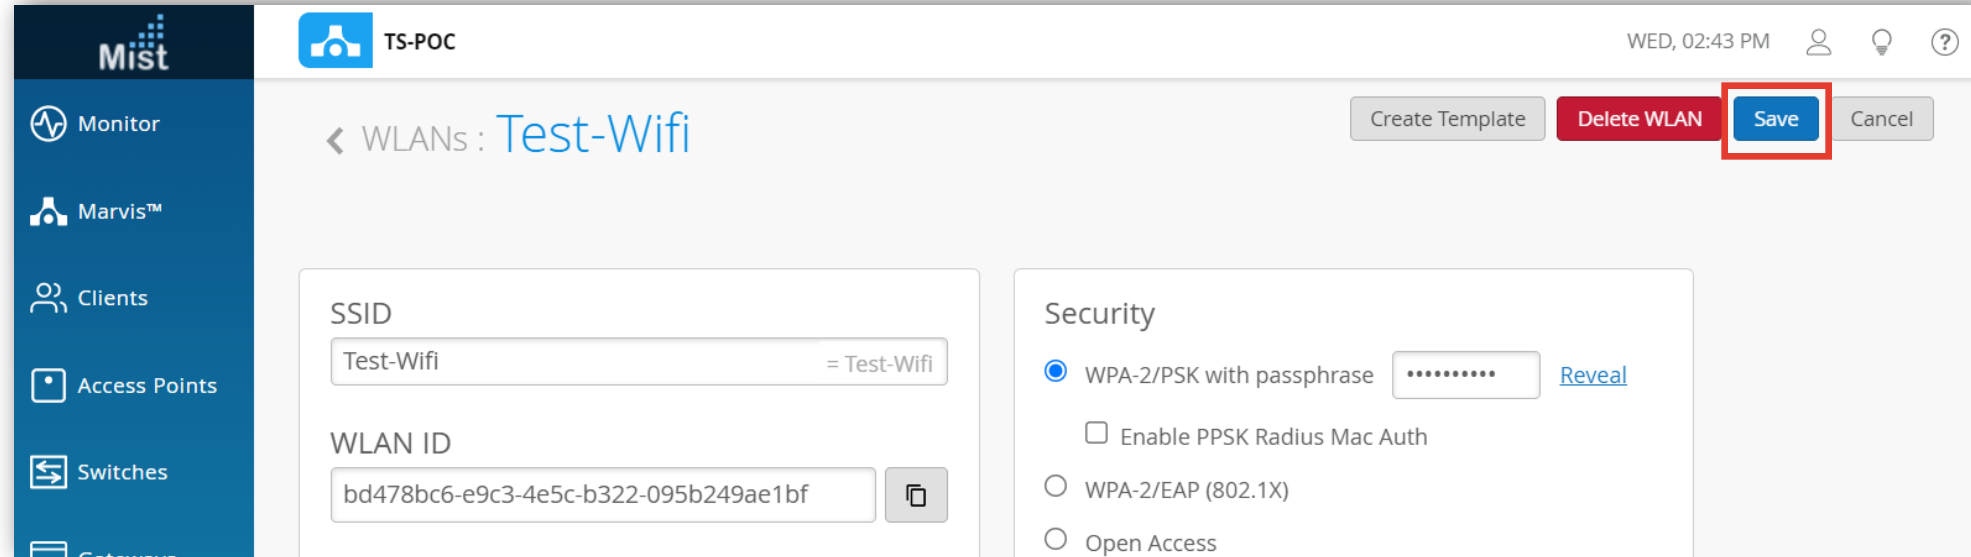

The screenshot displays the Mist management console interface for configuring a WLAN. The left sidebar contains navigation options: Monitor, Marvis™, Clients, Access Points, Switches, and Gateways. The main content area is titled 'WLANs : Test-Wifi' and includes a top navigation bar with 'Create Template', 'Delete WLAN', 'Save', and 'Cancel' buttons. The 'Save' button is highlighted with a red box. The configuration form is divided into two sections: 'SSID' and 'Security'. The SSID section has a text input field containing 'Test-Wifi' with a copy icon and a label '= Test-Wifi'. The WLAN ID section has a text input field containing 'bd478bc6-e9c3-4e5c-b322-095b249ae1bf' with a copy icon. The Security section features a radio button selected for 'WPA-2/PSK with passphrase', a password input field with a 'Reveal' link, and an unchecked checkbox for 'Enable PPSK Radius Mac Auth'. Below these are two unselected radio buttons for 'WPA-2/EAP (802.1X)' and 'Open Access'.

# Thank you

---

JUNIPER  
driven by Mist AI 